




INDEX TO SHEETS		
SHEET NO.	# OF SHEETS	DESCRIPTION
1-A	1	TITLE SHEET
1-B	1	GENERAL NOTES, ABBREVIATIONS & LEGEND
1-C	1	BID ITEM SUMMARY
RMV-01	1	REMOVAL
RD-01	1	ROADWAY PLAN
LTG-01	1	LIGHTING PLAN
DT-01	1	DETAILS
DT-02	1	DETAILS



UTAH EDITION OF THE APWA MANUAL OF STANDARD SPECIFICATION
AND MANUAL OF STANDARD PLANS 2025 EDITION AND SPECIAL
PROVISIONS IN THE PROJECT MANUAL APPLY ON THIS PROJECT.

APPROVED BY OGDEN CITY	CONSULTANT PROJECT MANAGER
_____ DATE	 07/15/2025 _____ GARY HORTON, S.E. DATE



23RD STREET - THE JUNCTION INTERSECTION IMPROVEMENTS

PROJECT NUMBER
23-297

BASE BID SCHEDULE				
NUMBER	KEYNOTE	DESCRIPTION	BASE BID	UNIT
1	N/A	PROGRESS SCHEDULE	1	LUMP
2	N/A	TRAFFIC CONTROL	1	LUMP
3	N/A	SEDIMENT AND EROSION CONTROL	1	LUMP
4	N/A	MOBILIZATION	1	LUMP
5	N/A	CONSTRUCTION SURVEY	1	LUMP
6	N/A	LOCATE UTILITIES	10	EACH
7	101	REMOVE PAVERS	494	SQ YD
8	102	REMOVE MOUNTING BASE	27	EACH
9	103	REMOVE AND SALVAGE STOP SIGN	4	EACH
10	104	REMOVE DIAMOND PLATE COVER	2	EACH
11	201	FLATWORK, 4" THICK	80	SQ YD
12	202	STAMPED COLORED CONCRETE, 4" THICK, HEX#9A765D	292	SQ YD
13	203	STAMPED COLORED CONCRETE, 4" THICK, HEX#786B65	117	SQ YD
14	205	DETECTABLE WARNING SURFACE	4	EACH
15	206	PRECAST CONCRETE BENCH	24	EACH
16	207	PAVERS IN ARCH PATTERN	2	SQ YD
17	301	TELSPAR STYLE SIGN POST	4	EACH
18	302	SIGNAGE, R1-1 STOP SIGN (30X30)	4	EACH
19	303	SIGNAGE, R1-3P ALL WAY (18X6)	4	EACH
20	601	CONDUIT, PVC, 2 INCH DIAMETER	341	FT
21	602	INSTALL DECORATIVE LIGHT POLE	8	EACH
22	603	LIGHTING WIRE	478	FT
23	604	UNDERGROUND BORE	258	FT
24	701	MANHOLE LID	3	EACH

PROJECT		23RD STREET - THE JUNCTION		INTERSECTION IMPROVEMENTS		23-297		BID ITEM SUMMARY		SHEET NO. 1-C	
PROJECT NUMBER		23RD STREET AND KESEL AVE		OGDEN, UT 84401		807-629-8000		OGDEN CITY		CHECKED BY: EKL	
										DESIGNED BY: JT	
										DATE: 3/19/25	
										SCALE: N/A	
										APPROVED	
										PROFESSIONAL ENGINEER	



- 10
-
- 10
-
- 10
-
- 10

- 1
- 2
- 3.



WALL CONSULTANT GROUP


APPROVED _____
PROFESSIONAL ENGINEER

1 |

- 1.
- 2.
- 3.
- 4.


23RD STREET - THE JUNCTION

INTERSECTION IMPROVEMENTS

23-297


REMOVAL

SHEET NO. **RMV-01**

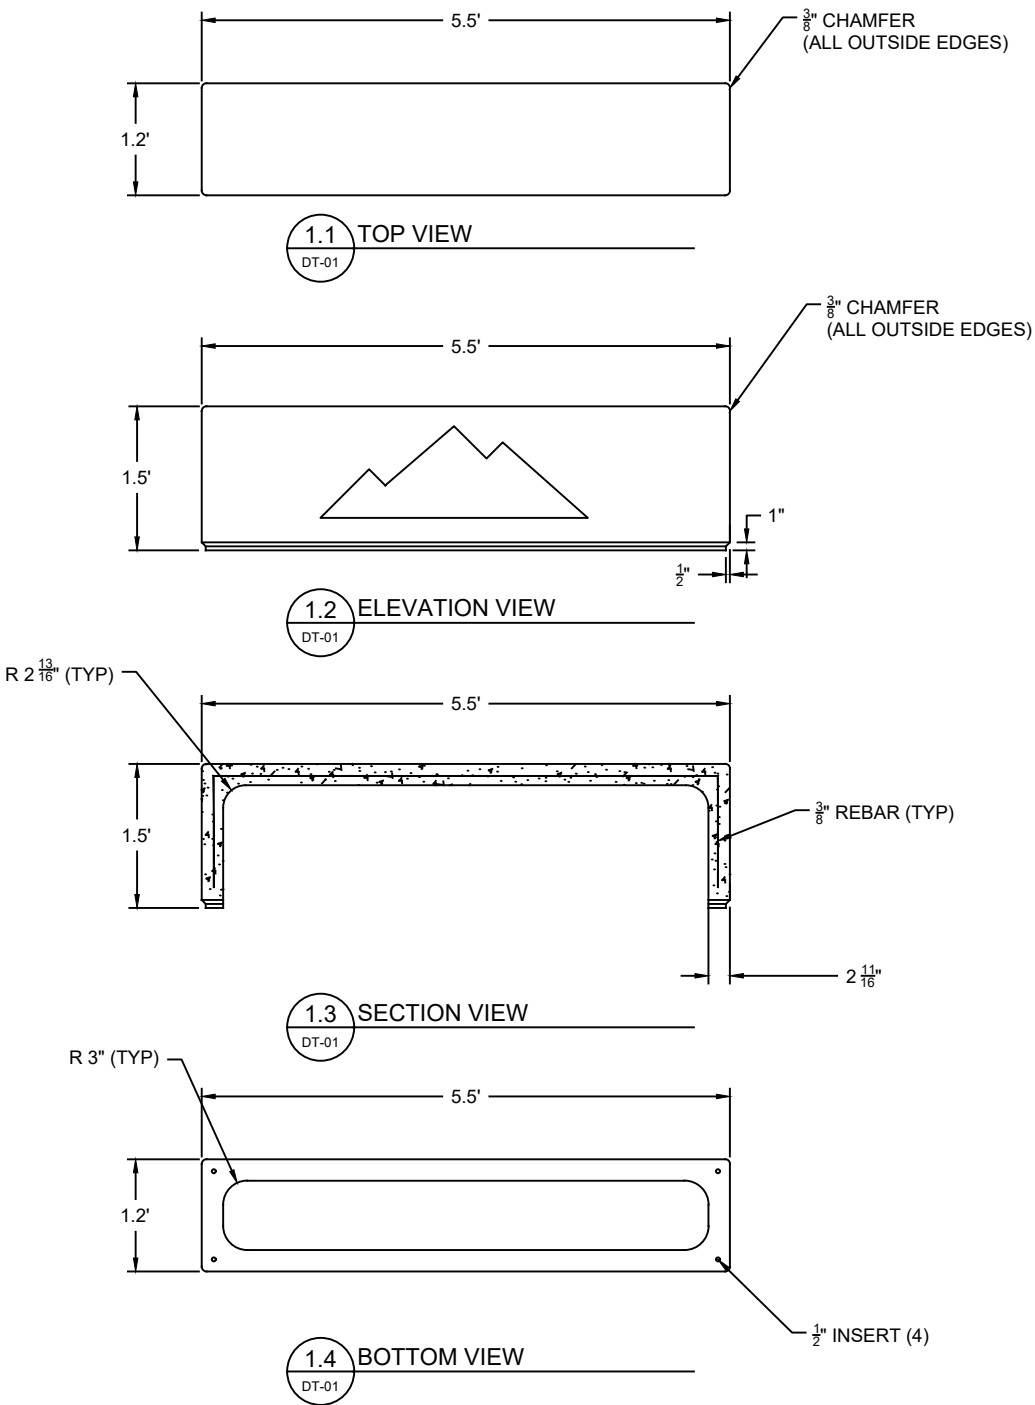

- NOTE:
- CONTRACTOR TO SUBMIT AT LEAST THREE STAMP DESIGNS AND THREE COLOR SAMPLES TO OGDEN CITY ENGINEER FOR APPROVAL PRIOR TO CONSTRUCTION. STAMP DESIGN CAN VARY AND INCLUDE MOUNTAINS, RIVER THEME, RODEO THEME, OR SIMILAR.
 - ALL OUTSIDE CORNERS OF BENCH SHALL BE CHAMFERED EDGES.
 - BENCHES SHALL BE ANCHORED WITH REBAR IN 1/2" INSERTS.

1 PRECAST CONCRETE BENCH
DT-01

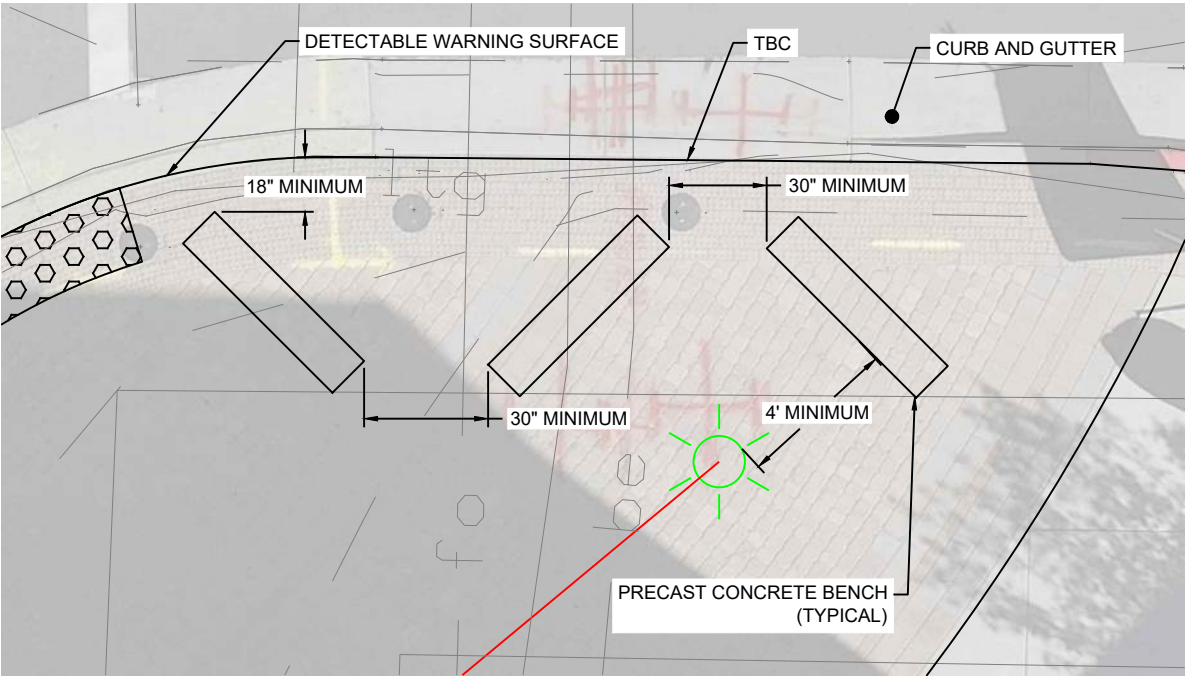

2 BENCH PLACEMENT
DT-01



- NOTE:
- STAMP PATTERN SHALL FOLLOW THE CURVE OF THE EXISTING PAVERS.
 - CONTRACTOR TO USE RUNNING BOND BRICK PATTERN IMPRINT WITH A ROLLER. WIDTH OF ROLLER CAN BE THE NARROW OR WIDE OPTION. IF CONTRACTOR HAS STAMP THAT WILL BETTER MATCH THE EXISTING, CONTRACTOR SHALL SUBMIT PRODUCT AND PATTERN INFORMATION TO OGDEN CITY ENGINEER FOR APPROVAL BEFORE USE.

3 STAMPED CONCRETE
DT-01

SHEET NO.		DT-01	
PROJECT		23 RD STREET - THE JUNCTION	
PROJECT NUMBER		IMPROVEMENTS	
		PROJECT NO. 23-297	
		DETAILS	
		WALL CONSULTANT GROUP 2139 SOUTH 1260 WEST SALT LAKE CITY, UT 84119 PHONE 801-456-3847	
APPROVED			

